

ADC Series

Wires specification: PR EN4681-004



General purpose high-performance feeder wires.
Designed for aerospace and other applications
requiring excellent thermal stability and light weight.



Cable characteristics



-55 +180°C



Excellent



FAR25_
ABD0031

Environmental

- Operating temperature: -55°C to 180°C (ambient temperature + current heating)
- Resistant to Aircraft fluids (oils, hydrocarbons, kerosene, skydrols...), Chemical agents
- Arc Tracking resistant


Electrical

Maximum operating voltage:

- 115V (phase to neutral) or 200V (phase to phase) AC Electrical systems of aircraft
- 230/400V AC in pressurized zones with specific installation rules to take account of possible short circuit effects.

Operating frequency: up to 2000Hz

Cable design

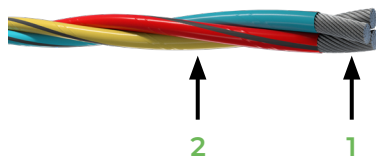

1. Stranded conductor: Un-plated Aluminium
2. Insulation: Polyimide/PTFE

Identification

- Wire color: Red, Blue, Yellow
- Wire Marking color: Black

Marking (example)

ADA yy FR A zz A
1 2 3 4 5 6

e.g. ADA 3 FR A 23 A

1. Short Designation
2. Gauge
3. Country of Origin
4. Manufacturer (A: Draka)
5. Manufacturing Year
6. Un-plated Aluminium

Specifications

Conductors

For AWG 3 to AWG 000 according to EN 3719 (analogy with ABS0957)

Wires Specifications

PR EN4681-004 (analogy with ABS1354)

Technical Specification

PR EN4681-001 (analogy with ABS0958)

Compliant to ABD0031

Flammability, Smoke and Toxicity requirements and 14 CFR FAR25-1713

Dimensional

For single wires (ADA), refer to PR EN4681-003 (ABS0949) data sheet (AD)

Short designation	Number of wires	Nominal cross section mm ²	AWG*	Linear resistance max. at 20°C		Outer diameter max.		Weight max.	
				Ω/km	Ω/1000ft	mm	inch	kg/km	Lbs/1000ft
ADC3	3	28.6	3	1.22	0.372	16.7	0.6575	290.5	195.22
ADC2	3	34.7	2	0.97	0.295	18.5	0.7283	360.0	241.92
ADC1	3	12.9	1	0.78	0.238	20.5	0.8071	443.4	297.97
ADC0	3	55.3	0	0.62	0.189	23.5	0.9252	559.6	376.06
ADC00	3	73.5	00	0.45	0.137	26.6	1.0472	710.7	477.60
ADC000	3	89.9	000	0.37	0.113	29.5	1.1614	852.8	573.09

*Closest American Wire Gauge

Bending radius

Permissible bend radius (recommendation following EN3197)	AWG
	3 to 000
Static use	11xØ
Dynamic use	22xØ



Prysmian câbles et systèmes France
Head Office

23 avenue Aristide Briand - BP 801 - PARON - 89108 SENS Cedex / France
Tel : +33 (0)4 72 46 73 99 - infocables.fr@prysmian.com

Draka Fileca SAS

D 1001 - 60730 Sainte-Geneviève / France
fileca-office@prysmian.com



www.prysmian.com



© PRYSMIAN 2024

All Rights Reserved. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.